




ALL - ALUMINIUM & STAINLESS STEEL AIR FILTER

- All stainless steel / Aluminium construction
- Clean and renewable by water
- Multiple layers media with stainless steel / Aluminium wire mesh
- Suitable for use in very difficult operating conditions
- High velocity and low pressure drop
- Eliminator for oil and water mists
- EN 779 Filter Class: G2-G4
- Available for 1", 2" and 4" frame thickness

Specification

Model	Efficiency EN 779 Weight Arrestance	Dimensions (mm)	Airflow capacity (CMM)	Initial pressure drop (mmAq)
VR A1 - 2000	G2	592 x 592 x 25	56.0	2.5
VR A1 - 1000	70 - 75 %	592 x 287 x 25	28.0	2.5
VR A2 - 2000	G3	592 x 592 x 50	56.0	3.0
VR A2 - 1000	80 - 85 %	592 x 287 x 50	28.0	3.0
VR A4 - 2000	G4	592 x 592 x 100	56.0	6.0
VR A4 - 1000	90 - 92 %	592 x 287 x 100	28.0	6.0

Note: Special sizes available upon request

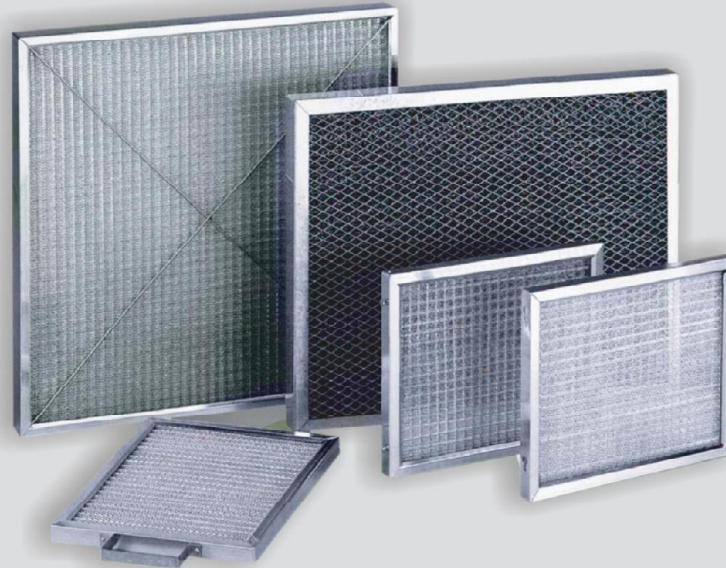

Sales Office

108 Nhat Chi Mai St., Ward 13
Tan Binh Dist., HCM City, Vietnam
P. (84-8) 62924569
F. (84-8) 38428631
www.vietfil.com

Viet Air Filter Manufacturing Corporation

Lot C3.4, N14 Street, Dong An II Industrial Park,
Hoa Phu Ward, Thu Dau Mot City,
Binh Duong Province, Vietnam
P. (84-650) 3589499 - F. (84-650) 3589495
E. info@vietfil.com